


Plate Buffers



Flat Buffers are a low cost solution to absorbing shock & vibration. They are used in compression, and are available with various mounting configurations. Additional Sizes are available, Plus Stainless Steel metals and Oil Resistant / High Temperature rubbers available on request.

Applications include - General purpose mountings used in a wide variety of applications, including Construction, Agricultural, Commercial Vehicle & General Industrial Machinery.


PART	A	B	C	D	E	F	G	Max Kg
PB335	84.0	32.0	19	46	6.9	68.6	3.2	750.0
PB238	121.0	57.0	56	86	8.6	105.0	6.3	4200.0
PB15	150.0	60.0	50	90	10.0	125.0	6.0	3000.0
PB260	156.0	64.0	36	88	13.5	127.0	5.0	2400.0

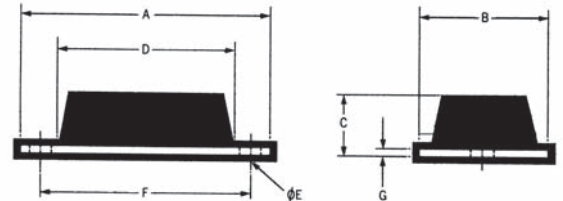

Square Plate Buffers




PART	a1	a2	D	d	H	s1	Max Kg
PB50	50	40	40	5,5	32	2	1530
PB63	63	50	50	6,5	40	3	2440
PB80	80	63	63	6,5	50	4	3820
PB100	100	80	80	9	63	5	6110
PB125	125	100	100	9	80	6	9680
PB160	160	125	125	11	100	6	15290
PB200	200	160	160	11	125	8	24460
PB250	250	200	200	13	160	8	38220

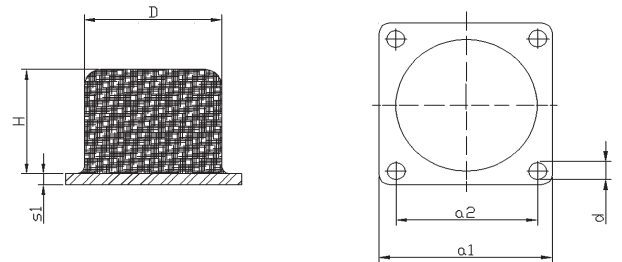

Truck Buffers



PART NO.	H	L	B	HOLES	A	D1	D2
BS-1	15	125	40	2	60	19.7	8
BS-2	40	125	40	2	60	19.8	8
BS-3	50	125	43	2	60	20.03	8
BS-4	70	125	43	2	60	19.8	8
BS-5	60	200	52	2	120	26	10.5
BS-6	80	200	52	2	120	26	10.5
BS-7	60	300	52	3	115	26	10.5
BS-8	80	300	52	3	115	26	10.5
BS-9	60	400	52	3	165	26	10.5
BS-10	80	400	52	3	165	26	10.5
BS-11	35	530	60	4	157	26	12.5

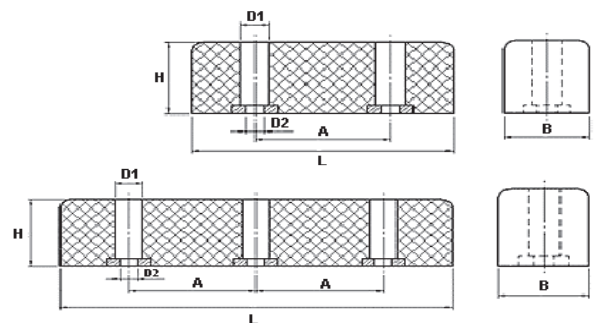

DATA SHEET PB/SPB/TB 2011. Max compression load in Kg deflection in mm.

This information is for guidance only. Customers are recommended to contact us for further technical information on products and applications. We reserve the right to alter specifications or withdraw products without notice.