


T-Bush

Installation

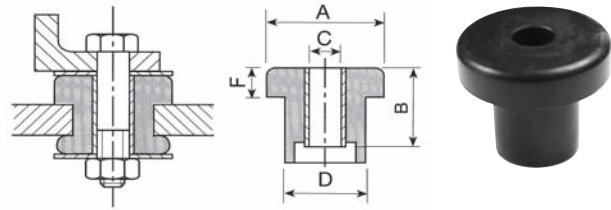


T Bushes offer a low cost solution for isolating vibration, reducing structure borne noise & absorbing shock forces for both mobile & static applications. Using overload & rebound washers they provide a fail safe mounting system. The mounting also has the benefit of being low profile.

Applications Include: Engines, Cabs, Pumps, Fuel Tanks, Radiators, Compressors & Industrial Equipment etc.

PART	A	B	C	D	F	Kg	mm
TB25	27	17.5	10	20	6	50	0.7
TB45	43	25	13	31	10	100	1.2
TB50	49	35	13	34	13	200	1.6
TB60	63	30	16	41	15	250	2
TB65	63	44	16	41	15	250	2
TB75	75.5	50.8	16.3	50.3	20.6	340	2.16
TBCBA20	50.8	36.8	13.5	35.1	19.1	181	2.5
TBCBA24	59.7	38.1	16	38.1	17.5	295	2.5
TBCBA28	71.1	41.4	20	41.1	17.5	476	2.5
TBCBA33	83.8	49.3	20	41.1	22.4	725	3

Grommet Mount

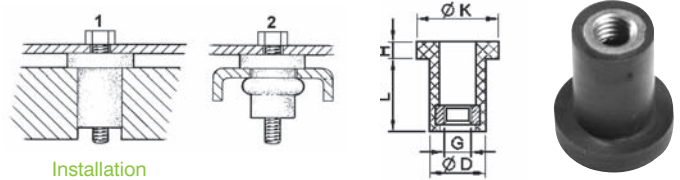


Installation

Grommet Mounts are a low cost product normally used as a fastening method, and also to isolate high frequency vibrations.

Applications Include: Vehicle & Motorcycle body panels / Fairings, Light weight equipment, electronics etc.

PART NO.	D	K	L	H	G
GM09	7.2	9	9	2.5	M3
GM12	9.3	12	11.5	3	M4
GM15	10.2	15	14.5	3.5	M5
GM18	12.7	18	17	4	M6
GM24	16.5	24	22	5	M8

Two-Piece Mounting

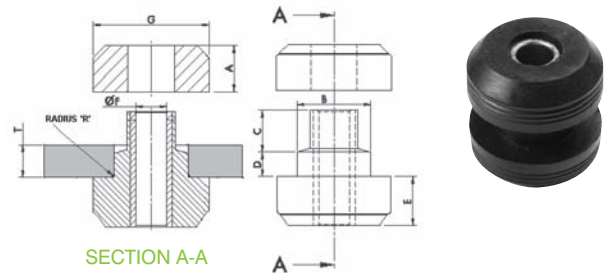

SECTION A-A

Two Piece Mountings are an ideal product for both mobile & static applications for reducing vibration, and allowing flexibility within a system, and are used for reducing stresses on brackets etc. Using washers ensures a failsafe mounting system arrangement.

Applications Include: Construction Equipment, Power Generation, Military Vehicles, Off Road & Agricultural, Industrial Machinery & Equipment.

PART	A	B	C	D	E	F	G	R	Tmax	Tmin
TP3035	12.3	20.1	10.3	9.3	12.3	10.3	33	1.0	9.5	9.5
TP4850	20	31	19	10	20	13.5	47.5	1.5	14	12.5
TP2203	22.5	39.5	24	15	23	16.5	64	2.5	22	19
TP9075	25	58.4	26.5	22	25	24.1	89	3.0	28.6	25.4

DATA SHEET TB/1 GHM/1 TP/1 2011. Max compression load in Kg deflection in mm.

This information is for guidance only. Customers are recommended to contact us for further technical information on products and applications. We reserve the right to alter specifications or withdraw products without notice.