


# Rail Mounting

**Rail Mounts** can be loaded in compression, shear or a combination of both by fitting at an angle.


**Applications** include:- engine mountings, generator sets, heavy plant & machinery.



## TYPE 1 (BOTTOM METAL ONLY)

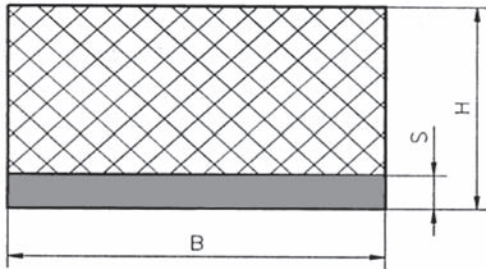

## TYPE 2 (TOP & BOTTOM METALS)

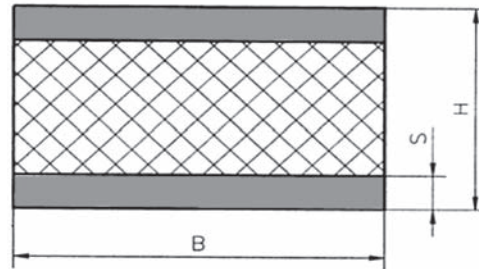

RAIL MOUNTINGS CAN BE SUPPLIED UP TO 2MTR'S IN LENGTH

PART	B	H	S		
			5	10	15
RM2030	20	30	•	–	–
RM2525	25	25	•	•	–
RM2530	25	30	•	•	–
RM3020	30	20	•	•	–
RM3030	30	30	•	•	–
RM4020	40	20	•	•	–
RM4030	40	30	•	•	–
RM4040	40	40	•	•	–
RM5030	50	30	•	•	–
RM5040	50	40	•	•	–
RM5050	50	50	•	•	–
RM5060	50	60	•	•	–
RM5070	50	70	•	•	–
RM6020	60	20	•	•	–
RM6030	60	30	•	•	–
RM6040	60	40	•	•	–
RM6050	60	50	•	•	–
RM6060	60	60	•	•	–
RM6070	60	70	•	•	–
RM6080	60	80	•	•	–
RM7030	70	30	•	•	–
RM7040	70	40	•	•	–
RM7050	70	50	•	•	–
RM7060	70	60	•	•	–
RM7070	70	70	•	•	–
RM7080	70	80	•	•	–

PART.	B	H	S		
			5	10	15
RM8040	80	40	•	•	–
RM8045	80	45	•	•	–
RM8060	80	60	•	•	–
RM8080	80	80	•	•	–
RM9045	90	45	–	•	•
RM10040	100	40	–	•	•
RM10050	100	50	–	•	•
RM10060	100	60	–	•	•
RM10070	100	70	–	•	•
RM10080	100	80	–	•	•
RM10090	100	90	–	•	•
RM100100	100	100	–	•	•
RM12045	120	45	–	•	•
RM12050	120	50	–	•	•
RM12060	120	60	–	•	•
RM12070	120	70	–	•	•
RM12080	120	80	–	•	•
RM15050	150	50	–	•	•
RM15060	150	60	–	•	•
RM15070	150	70	–	•	•
RM15080	150	80	–	•	•
RM15090	150	90	–	•	•
RM150100	150	100	–	•	•
RM20060	200	60	–	•	•
RM20080	200	80	–	•	•
RM200100	200	100	–	•	•

DATA SHEET RM 2011. Max compression load in Kg deflection in mm.

This information is for guidance only. Customers are recommended to contact us for further technical information on products and applications. We reserve the right to alter specifications or withdraw products without notice.