


Open Spring Mounts

AV Open Spring Mountings comprise of a single coil spring fixed to a steel base. They provide high levels of deflection, ideal for isolating low speed equipment.

Applications Include: Fans, Air Conditioning Units & Low Speed Equipment

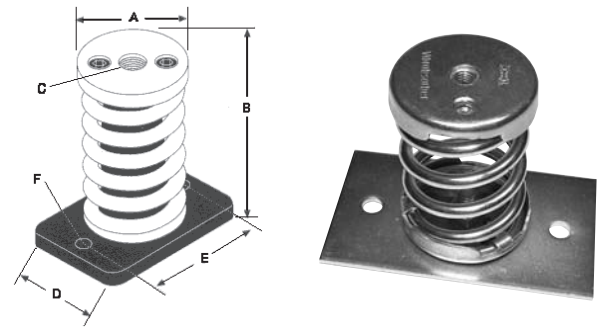

*Dimensions stated are with metal foot plate

PART	A	B	C	D	E	F	MAX LOAD	MAX DEFLECTION
NUMBER	mm	mm	mm	mm	mm	mm		
OSN10B	55	61	M8	55	70	10	10Kg	11mm
OSN15B	55	61	M8	55	70	10	15Kg	11mm
OSN25B	55	61	M8	55	70	10	25Kg	11mm
OSN50B	55	61	M8	55	70	10	50Kg	11mm
OSN75B	55	61	M8	55	70	10	75Kg	11mm
OSN100B	55	61	M8	55	70	10	100Kg	11mm
OSM25B	55	81	M8	55	70	10	25Kg	20mm
OSM50B	55	81	M8	55	70	10	50Kg	20mm
OSM75B	55	81	M8	55	70	10	75Kg	20mm
OSM100B	55	81	M8	55	70	10	100Kg	20mm
OSM125B	55	81	M8	55	70	10	125Kg	20mm
OSM150	73	118	M12	75	89	10	150Kg	30mm
OSM200	73	118	M12	75	89	10	200Kg	30mm
OSM250	73	118	M12	75	89	10	250Kg	30mm
OSM350	73	118	M12	75	89	10	350Kg	30mm
OSM450	73	118	M12	75	89	10	450Kg	30mm
OSM550	73	118	M12	75	89	10	550Kg	30mm

DATA SHEET OS/1 2011. Max compression load in Kg deflection in mm.

This information is for guidance only. Customers are recommended to contact us for further technical information on products and applications. We reserve the right to alter specifications or withdraw products without notice.