


Female - Female Bobbins

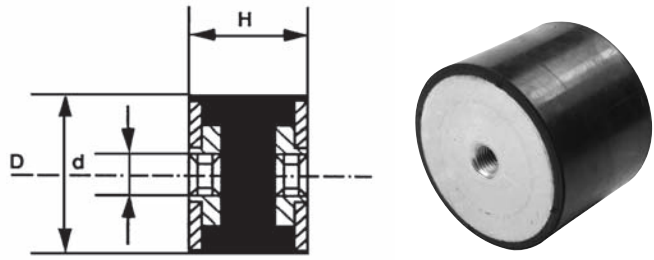

Bobbin Mounts are a low cost solution to reducing vibration & shock. They can be used in either Compression or Shear or a combination, and are available with various thread configurations. Additional Sizes are available, Plus Stainless Steel metals and Oil Resistant / High Temperature rubbers available on request.

Applications include - General Purpose mountings, popular in a wide range of applications & industries including Diesel Engines, Generator Sets, Instruments, Industrial Machinery & Equipment. Weight range from 1kg to 2000Kg per mounting.

PART	D x H	d	45 IRHD	60 IRHD	70 IRHD	mm
1515FF04	15 x 15	M4	6.1	11.2	15.8	1.3
2015FF06	20 x 15	M6	7.9	14.8	20.5	1.0
2020FF06	20 x 20	M6	7.4	13.7	18.9	1.6
2025FF06	20 x 25	M6	7.0	12.6	17.8	2.2
2030FF06	20 x 30	M6	5.6	10.0	14.1	2.6
2515FF06	25 x 15	M6	15.7	30.0	42.0	1.0
2520FF06	25 x 20	M6	16.8	31.0	41.0	1.6
2525FF06	25 x 25	M6	13.0	25.0	34.0	2.1
3020FF08	30 x 20	M8	15.7	30.0	40.0	1.2
3025FF08	30 x 25	M8	18.0	31.0	42.0	2.1
3030FF08	30 x 30	M8	15.8	30.0	40.0	2.6
3040FF08	30 x 40	M8	14.7	29.0	38.0	3.6
4020FF08	40 x 20	M8	32.0	61.0	88.0	1.2
4025FF08	40 x 25	M8	37.0	68.0	93.0	2.4
4030FF08	40 x 30	M8	35	65	91.0	2.6
4030FF10	40 x 30	M10	35.0	65.0	91.0	2.6
4035FF08	40 x 35	M8	27.0	54.0	79.0	2.5
4035FF10	40 x 35	M10	27.0	54.0	79.0	2.5
4040FF08	40 x 40	M8	31.0	57.0	78.0	3.6
4040FF10	40 x 40	M10	31.0	57.0	78.0	3.6
4045FF10	40 x 45	M10	30.0	56.0	77.0	4.1
5025FF10	50 x 25	M10	76.0	140.0	193.0	2.1
5030FF10	50 x 30	M10	71.0	131.0	180.0	2.5
5035FF10	50 x 35	M10	62.0	115.0	158.0	3.0
5040FF10	50 x 40	M10	51.0	95.0	132.0	3.5
5045FF10	50 x 45	M10	46.0	86.0	120.0	4.0
5050FF10	50 x 50	M10	42.0	86.0	109.0	4.5

PART	D x H	d	45 IRHD	60 IRHD	70 IRHD	mm
6035FF12	60 x 35	M12	111.0	260.0	285.0	3.1
6040FF10	60 x 40	M10	103.0	192.0	261.0	3.5
6040FF12	60 x 40	M12	103.0	192.0	261.0	3.5
6045FF10	60 x 45	M10	93.0	174.0	241.0	4.0
6045FF12	60 x 45	M12	93.0	174.0	241.0	4.0
6050FF12	60 x 50	M12	84.0	156.0	215.0	4.5
6535FF12	65 x 35	M12	135.0	252.0	348.0	3.0
7030FF10	70 x 30	M10	178.0	330.0	450.0	2.4
7035FF10	70 x 35	M10	157.0	312.0	430.0	2.9
7035FF12	70 x 35	M12	157.0	312.0	430.0	2.9
7040FF10	70 x 40	M10	145.0	270.0	375.0	3.4
7045FF10	70 x 45	M10	130.0	240.0	327.0	3.9
7045FF12	70 x 45	M12	130.0	240.0	327.0	3.9
7050FF10	70 x 50	M10	120.0	220.0	305.0	4.4
7050FF12	70 x 50	M12	120.0	220.0	305.0	4.4
7060FF12	70 x 60	M12	118.0	218.0	300.0	5.4
7070FF10	70 x 70	M10	113.0	210.0	290.0	6.4
7540FF12	75 x 40	M12	157.0	290.0	400.0	3.4
7550FF12	75 x 50	M12	150.0	280.0	390.0	4.4
7555FF12	75 x 55	M12	130.0	245.0	340.0	4.9
10040FF16	100 x 40	M16	390.0	700.0	970.0	3.2
10045FF16	100 x 45	M16	345.0	625.0	865.0	3.7
10050FF16	100 x 50	M16	305.0	550.0	760.0	4.2
10055FF16	100 x 55	M16	280.0	520.0	720.0	4.7
10060FF16	100 x 60	M16	270.0	490.0	680.0	5.2
100100FF16	100 x 100	M16	175.0	305.0	430.0	9.2
15075FF16	150 x 75	M16	405.0	725.0	1010.0	6.7

DATA SHEET FF 2011. Max compression load in Kg deflection in mm.

This information is for guidance only. Customers are recommended to contact us for further technical information on products and applications. We reserve the right to alter specifications or withdraw products without notice.