


# Waisted Bobbins

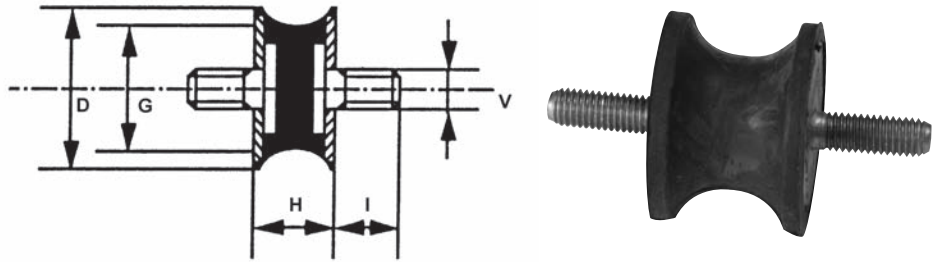

**Waisted Bobbin Mounts** offer low shear stiffness properties, and are available with various Thread configurations. Stainless Steel metals and Oil Resistant / High Temperature rubbers available on request.

**Applications include** - Lightweight equipment, vibratory feeders, electric motors, control panels etc.

## NOTE: PARTS ALSO AVAILABLE IN MALE FEMALE VERSION

PART NUMBER	D	G	H	I	V	45 IRHD	60 IRHD	70 IRHD	DEF.
	mm	mm	mm	mm	mm	KG	KG	KG	mm
1008WMM06	10	4.5	8	6	M3	-	-	-	-
1010WMM10	10	8	10	10	M4	-	-	-	-
15/8.5/15WMM10	15	8.5	15	10	M4	4.3	8.5	12.5	1.8
15/12/15WMM10	15	12	15	10	M4	6.9	13.8	20.3	2.1
15/12/15WMM12	15	12	15	12	M6	6.9	13.8	20.3	2.1
2015WMM10	20	14	15	10	M4	-	-	-	-
2019WMM18	20	14	19	18	M6	10	15	20.5	2.5
20/12/30WMM18	20	12	30	18	M6	-	-	-	-
20/14/30WMM10	20	14	30	10	M4	-	-	-	-
25/17/20WMM18	25	17	20	18	M6	14.5	22	30.5	3
25/18/20WMM23	25	18	20	23	M8	-	-	-	-
30/22/20WMM23	30	22	20	23	M8	-	-	-	-
30/25/20WMM23	30	25	20	23	M8	-	-	-	-
3025WMM15	30	18	25	15	M6	-	-	-	-
3041WMM20	30	20	41	20	M8	-	-	-	-
40/25/30WMM23	40	25	30	23	M8	-	-	-	-
40/33/30WMM23	40	33	30	23	M8	-	-	-	-
4048WMM23	40	20	48	23	M8	-	-	-	-
4625WMM28	46	40	25	28	M10	-	-	-	-
5030WMM28	50	42	30	28	M10	-	-	-	-
5545WMM28	55	44	45	28	M8	-	-	-	-
57/25/44WMM28	57	25	44	28	M10	-	-	-	-
57/44/45WMM28	57	44	45	28	M10	-	-	-	-
57/25/45WMM20	57	25	45	20	M8	-	-	-	-
6060WMM28	60	49	60	28	M10	-	-	-	-
7053WMM28	70	45	53	28	M12	-	-	-	-
9575WMM41	95	80	75	41	M16	-	-	-	-
180/148/75WMM34	180	148	75	34	M20	-	-	-	-
180/150/75WMM45	180	150	75	45	M20	-	-	-	-
1380WMM	35	24	34	20	M8	15	30	40	2.7

DATA SHEET WMM/1 2011. Max compression load in Kg deflection in mm.

This information is for guidance only. Customers are recommended to contact us for further technical information on products and applications. We reserve the right to alter specifications or withdraw products without notice.