


# Male Male Bobbins

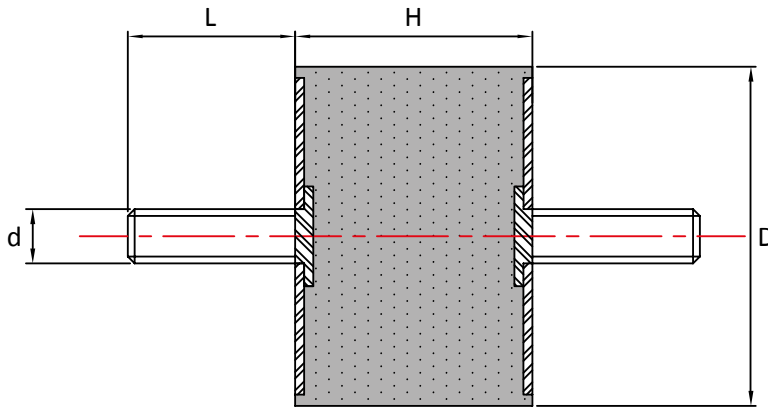

Part No	D x H	d x L	45° Shore A	60° Shore A	70° Shore A	mm
0808MM06	08 x 08	M3 x 06	1.8	3.3	4.5	0.6
1008MM10	10 x 08	M4 x 10	2.3	4.3	6.0	0.6
1010MM10	10 x 10	M4 x 10	2.0	3.4	5.5	0.8
1111MM10	11 x 11	M4 x 10	2.1	4.5	6.0	0.5
1508MM10	15 x 08	M4 x 10	7.7	14.1	19.5	0.6
1510MM10	15 x 10	M4 x 10	7	14	18.5	0.8
1515MM13	15 x 15	M4 x 13	5.8	10.7	15.0	1.3
1515MM15	15 x 15	M5 x 15	5.8	10.7	15.0	1.3
1515MM12	15 x 15	M6 x 12	5.8	10.7	15.0	1.3
1525MM10	15 x 25	M4 x 10	2.3	5.8	7.1	2.0
2008MM18	20 x 08	M6 x 18	16.6	31.0	42.0	0.8
2015MM18	20 x 15	M6 x 18	9.0	17.0	23.0	1.2
2020MM18	20 x 20	M6 x 18	7.0	13.0	18.0	1.6
2025MM18	20 x 25	M6 x 18	6.7	12.0	17.0	2.2
2030MM18	20 x 30	M6 x 18	5.3	9.6	13.5	2.6
2510MM18	25 x 10	M6 x 18	25.0	48.0	66.0	0.7
2515MM18	25 x 15	M6 x 18	18.0	34.0	48.0	1.2
2520MM18	25 x 20	M6 x 18	16.0	29.0	39.0	1.6
2520MM20	25 x 20	M8 x 20	16.0	29.0	39.0	1.6
2522MM20	25 x 22	M8 x 20	14.4	27.0	36.0	1.8
2525MM18	25 x 25	M6 x 18	12.4	23.0	32.0	2.1
2530MM18	25 x 30	M6 x 18	11.5	22.0	29.0	2.7
2530MM20	25 x 30	M8 x 20	11.5	22.0	29.0	2.7
3015MM20	30 x 15	M8 x 20	22.0	41.0	57.0	1.1
3020MM15	30 x 20	M8 x 15	20.0	38.0	51.0	1.6
3020MM20	30 x 20	M8 x 20	20.0	38.0	51.0	1.6
3022MM20	30 x 22	M8 x 20	19.0	34.0	47.0	1.8
3025MM20	30 x 25	M8 x 20	17.0	29.0	40.0	2.1
3030MM20	30 x 30	M8 x 20	15.0	28.0	38.0	2.6
3040MM20	30 x 40	M8 x 20	14.0	27.0	36.0	3.6
4020MM23	40 x 20	M8 x 23	41.0	77.0	106.0	1.6
4020MM25	40 x 20	M10 x 25	41.0	77.0	106.0	1.6
4025MM25	40 x 25	M10 x 25	38.0	71.0	97.0	2.1
4028MM25	40 x 28	M10 x 25	35.0	65.0	89.0	2.4
4030MM23	40 x 30	M8 x 23	33.0	62.0	87.0	2.6
4030MM25	40 x 30	M10 x 25	33.0	62.0	87.0	2.6
4035MM23	40 x 35	M8 x 23	30.0	56.0	78.0	3.1
4035MM25	40 x 35	M10 x 25	30.0	56.0	78.0	3.1
4040MM23	40 x 40	M8 x 23	29.0	54.0	74.0	3.6
4040MM25	40 x 40	M10 x 25	29.0	54.0	74.0	3.6
4045MM25	40 x 45	M10 x 25	28.0	52.0	73.0	4.1
5020MM28	50 x 20	M10 x 28	85.0	159.0	219.0	1.5

Part No	D x H	d x L	45° Shore A	60° Shore A	70° Shore A	mm
5025MM25	50 x 25	M10 x 25	79.0	147.0	203.0	2.0
5030MM23	50 x 30	M8 x 23	68.0	125.0	173.0	2.5
5030MM28	50 x 30	M10 x 28	68.0	125.0	173.0	2.5
5035MM25	50 x 35	M10 x 25	59.0	110.0	151.0	3.0
5040MM25	50 x 40	M10 x 25	49.0	91.0	126.0	3.5
5040MM28	50 x 40	M10 x 28	49.0	91.0	126.0	3.5
5045MM25	50 x 45	M10 x 25	44.0	82.0	114.0	4.0
5050MM25	50 x 50	M10 x 25	40.0	76.0	104.0	4.5
6025MM25	60 x 25	M10 x 25	122.0	227.0	314.0	2.0
6030MM25	60 x 30	M10 x 25	108.0	200.0	276.0	2.5
6035MM25	60 x 35	M10 x 25	106.0	197.0	272.0	3.1
6035MM37	60 x 35	M12 x 37	106.0	197.0	272.0	3.1
6040MM25	60 x 40	M10 x 25	98.0	183.0	249.0	3.5
6040MM37	60 x 40	M12 x 37	98.0	183.0	249.0	3.5
6045MM25	60 x 45	M10 x 25	89.0	166.0	230.0	4.0
6045MM37	60 x 45	M12 x 37	89.0	166.0	230.0	4.0
6050MM37	60 x 50	M12 x 37	80.0	149.0	205.0	4.5
6535MM25	65 x 35	M10 x 25	129.0	240.0	332.0	3.0
7030MM25	70 x 30	M10 x 25	170.0	317.0	432.0	2.4
7030MM37	70 x 30	M12 x 37	170.0	317.0	432.0	2.4
7035MM25	70 x 35	M10 x 25	150.0	298.0	411.0	2.9
7035MM37	70 x 35	M12 x 37	150.0	298.0	411.0	2.9
7040MM25	70 x 40	M10 x 25	139.0	258.0	357.0	3.4
7040MM37	70 x 40	M12 x 37	139.0	258.0	357.0	3.4
7045MM25	70 x 45	M10 x 25	125.0	232.0	312.0	3.9
7045MM37	70 x 45	M12 x 37	125.0	232.0	312.0	3.9
7050MM25	70 x 50	M10 x 25	114.0	211.0	292.0	4.4
7050MM37	70 x 50	M12 x 37	114.0	211.0	292.0	4.4
7525MM37	75 x 25	M12 x 37	221.0	420.0	577.0	1.9
7535MM37	75 x 35	M12 x 37	170.0	340.0	470.0	2.9
7540MM37	75 x 40	M12 x 37	150.0	280.0	386.0	3.4
7550MM37	75 x 50	M12 x 37	143.0	268.0	370.0	4.4
7555MM37	75 x 55	M12 x 37	125.0	235.0	324.0	4.9
8030MM35	80 x 30	M14 x 35	270.0	512.0	704.0	2.4
10030MM44	100 x 30	M16 x 44	460.0	880.0	1210.0	2.2
10040MM44	100 x 40	M16 x 44	370.0	670.0	925.0	3.2
10050MM44	100 x 50	M16 x 44	290.0	525.0	725.0	4.2
10055MM44	100 x 55	M16 x 44	270.0	500.0	690.0	4.7
10060MM44	100 x 60	M16 x 44	260.0	470.0	650.0	5.2
10075MM44	100 x 75	M16 x 44	215.0	380.0	525.0	6.7
100100MM44	100 x 100	M16 x 44	165.0	295.0	410.0	9.2
15075MM44	150 x 75	M16 x 44	650.0	1196.0	1651.0	6.7

Max compression load in Kg deflection in mm.

This information is for guidance only. Customers are recommended to contact us for further technical information on products and applications.

We reserve the right to alter specifications or withdraw products without notice.