


Rectangular Sandwich Mountings

Sandwich mountings are a simple design whereby the rubber section is sandwiched between a top and bottom metal plate.

The mounting also incorporates an integrally bonded metal interleaf which increases the vertical stiffness and maximum load capacity of the mounting, whilst leaving the horizontal stiffness relatively unchanged.

The mountings can be used in Compression, Shear or a combination of both. For ultimate performance the mountings can be used in a "V" arrangement.

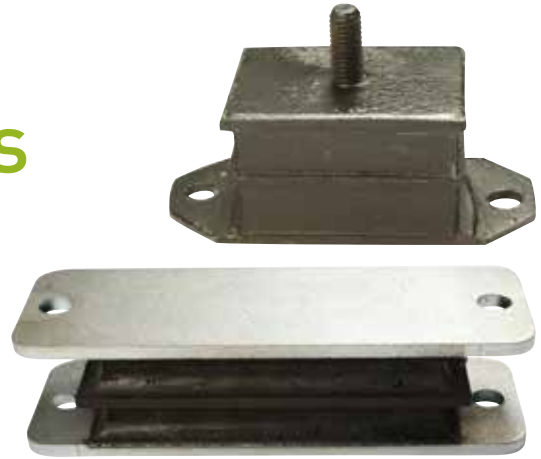


Advantages:

- High Vertical to Horizontal Stiffness Ratio
- Heavy Duty – up to 1000Kg per mounting
- High Performance – "V Arrangement"

Applications:

- Engine mountings
- Generator sets
- Heavy plant
- Machinery
- Vibratory Screens

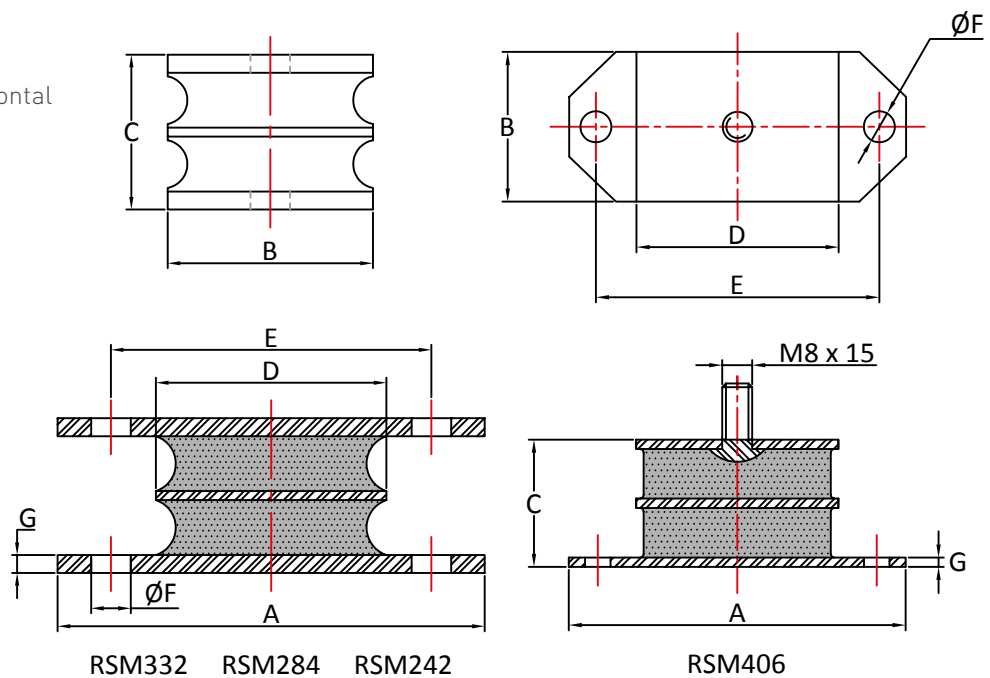

| Part No | A mm | B mm | C mm | D mm | E mm | F mm | G mm | Kg | mm |
|-----------|------|------|------|------|------|------|------|------|-----|
| RSM406-45 | 90 | 40 | 36 | 54 | 74.5 | 6.8 | 3.5 | 95 | 2.8 |
| RSM406-50 | 90 | 40 | 36 | 54 | 74.5 | 6.8 | 3.5 | 135 | 2.8 |
| RSM406-60 | 90 | 40 | 36 | 54 | 74.5 | 6.8 | 3.5 | 200 | 2.8 |
| RSM406-70 | 90 | 40 | 36 | 54 | 74.5 | 6.8 | 3.5 | 310 | 2.8 |
| RSM322-45 | 110 | 57 | 43 | 64 | 89 | 11 | 5 | 190 | 3 |
| RSM322-60 | 110 | 57 | 43 | 64 | 89 | 11 | 5 | 375 | 3 |
| RSM322-70 | 110 | 57 | 43 | 64 | 89 | 11 | 5 | 500 | 2.6 |
| RSM284-45 | 127 | 57 | 43 | 84 | 108 | 11 | 5 | 300 | 3 |
| RSM284-60 | 127 | 57 | 43 | 84 | 108 | 11 | 5 | 600 | 3 |
| RSM284-70 | 127 | 57 | 43 | 84 | 108 | 11 | 5 | 800 | 2.6 |
| RSM242-45 | 168 | 57 | 43 | 127 | 146 | 11 | 5 | 450 | 3 |
| RSM242-60 | 168 | 57 | 43 | 127 | 146 | 11 | 5 | 850 | 2.8 |
| RSM242-70 | 168 | 57 | 43 | 127 | 146 | 11 | 5 | 1000 | 2.2 |

Max compression load in Kg deflection in mm.

This information is for guidance only. Customers are recommended to contact us for further technical information on products and applications. We reserve the right to alter specifications or withdraw products without notice.