

UU Shear Mountings




UU Shear mountings are designed to load the rubber in shear and thereby provide a soft vertical spring rate and high levels of vibration absorption.

They are also suitable for absorbing shock. They fall within two distinct ranges, those that have zinc plate metals and those that have the metals fully encapsulated in rubber.

Applications:

- Small Generators
- Fans
- Sensitive instruments & Apparatus
- Low Speed Machines
- Shock Protection

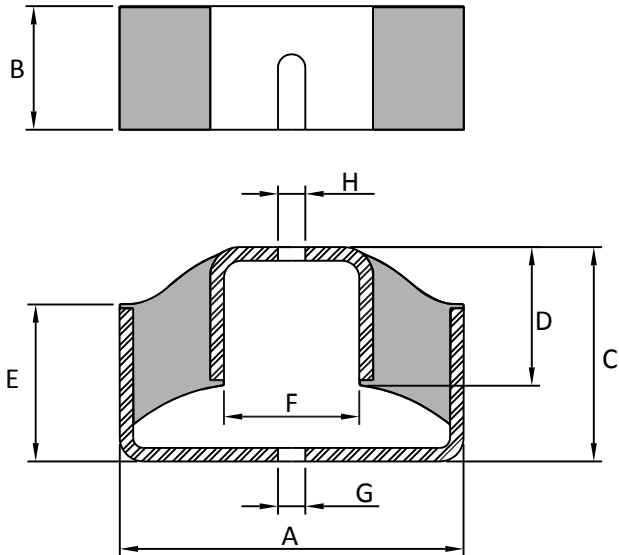

Part No	A mm	B mm	C mm	D mm	E mm	F mm	G & H mm	Max Load kg	Deflection mm
UU1492-40	61	20	43	25	27	20	6.6	14	8.0
UU1492-50								17	7.0
UU1482-40	60	50	43	19	30	17	10	43	8.0
UU1482-50								50	7.5
UU1481-40	70	25	62	37	43	25	10	17	8.0
UU1481-50								25	7.0
UU1481-60								28	4.5
UU1480-40	80	50	78	50	55	30	13	72	8.0
UU1480-50								92	7.0
UU1480-60								95	4.5
UU1479-40	86	64	108	76	82	38	16	152	8.0
UU1479-50								170	6.0
UU1479-60								205	4.0

Part No	A mm	B mm	C mm	D mm	E mm	F mm	G & H mm	Max Load kg	Deflection mm
UU20-40*	90	20	50	34	34	39	10	20	6.0
UU20-60*								35	5.0
UU20-70*								50	5.0
UU50-40*	90	50	50	34	34	39	12	60	6.2
UU50-60*								110	5.6
UU50-70*								160	5.6
UU100-40*	90	100	50	34	34	39	15	130	6.8
UU100-60*								250	6.8
UU100-70*								360	6.8

*Full encapsulated with rubber

Max compression load in Kg deflection in mm.

This information is for guidance only. Customers are recommended to contact us for further technical information on products and applications. We reserve the right to alter specifications or withdraw products without notice.