

Suspended Mounts





The Suspended Mountings are ideal for hanging or suspending equipment from walls, vertical surfaces, ceilings or supporting structures. The HNG Upper is used to accommodate tensile mounted loads at the top fixing of the equipment, whilst the HNG Lower is used to accommodate the compressive loads at the bottom of the equipment.

Advantages:

- Fail Safe Design
- Easy to Install
- Suspends from Ceilings & Walls

Applications:

- HVAC
- Ducting and Pipework
- Instrument Cabinets
- Control panels

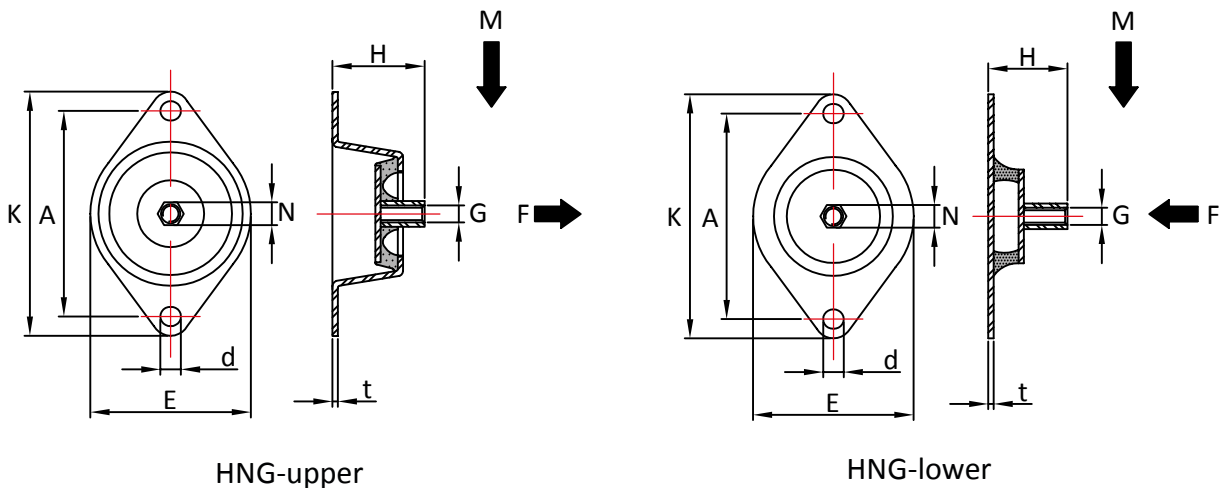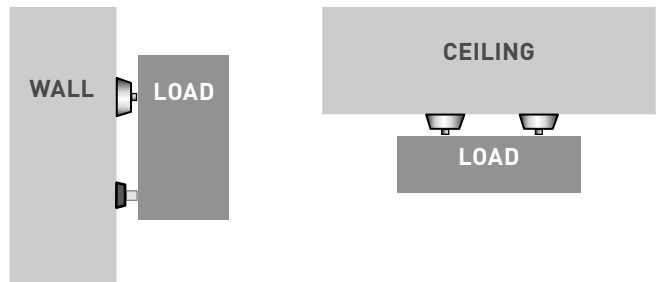

HNG-upper

HNG-lower

TYPE	E	K	A	H	d	N	t	G
HNG-upper	75	114	96	33	9	15	2.5	M8
HNG-lower	75	114	96	33	9	15	2.5	M8

TYPE	M-Max (KG)		F-Max (KG)	
	40° Sh	60° Sh	40° Sh	60° Sh
HNG-upper	14	25	30	70
HNG-lower	14	25	30	70

Max compression load in Kg deflection in mm.

This information is for guidance only. Customers are recommended to contact us for further technical information on products and applications. We reserve the right to alter specifications or withdraw products without notice.