


Rubber Sheets

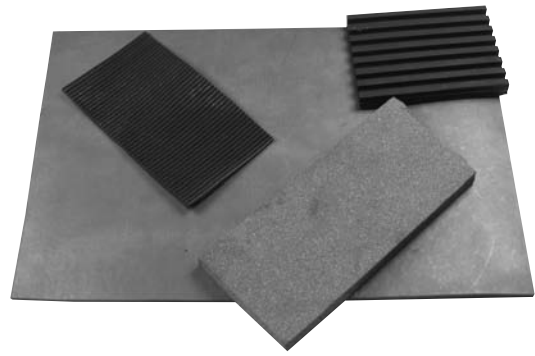

Plain Commercial Grade Rubber

| PART | THICKNESS | WIDTH | ROLL LENGTH |
|------------|-----------|---------|-------------|
| PCGR151410 | 1.5MM | 1.4MTRS | 10 MTRS |
| PCGR301410 | 3MM | 1.4MTRS | 10 MTRS |
| PCGR451410 | 4.5MM | 1.4MTRS | 10 MTRS |
| PCGR601410 | 6MM | 1.4MTRS | 10 MTRS |


Fabric Insertion Commercial Grade Rubber

| PART | THICKNESS | WIDTH | ROLL LENGTH |
|------------|-----------|---------|-------------|
| FICR151410 | 1.5MM | 1.4MTRS | 10 MTRS |
| FICR301410 | 3MM | 1.4MTRS | 10 MTRS |
| FICR451410 | 4.5MM | 1.4MTRS | 10 MTRS |
| FICR601410 | 6MM | 1.4MTRS | 10 MTRS |

Fine Fluted Commercial Grade Rubber

| PART | THICKNESS | WIDTH | ROLL LENGTH |
|------------|-----------|---------|-------------|
| FFCR151210 | 1.5MM | 1.2MTRS | 10MTRS |
| FFCR301210 | 3MM | 1.2MTRS | 10MTRS |

Rubber Mats

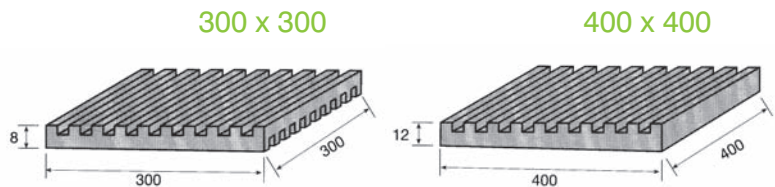

| PART NUMBER | DIMENSION OF MAT | MAX VERTICAL LOAD | | MAX LOAD Per MAT Kg | DEFLECTION mm |
|-------------|-------------------|-------------------|-------------------|---------------------|---------------|
| M300300 | 300 X 300 X 8 mm | 18900 | Kg/m ² | 1700 | 1.6 |
| M400400 | 400 X 400 X 12 mm | 21900 | Kg/m ² | 3500 | 2.4 |

Mats can be supplied in natural rubber or oil resistant neoprene rubber

DATA SHEET RS/RM 2011. Max compression load in Kg deflection in mm.

This information is for guidance only. Customers are recommended to contact us for further technical information on products and applications. We reserve the right to alter specifications or withdraw products without notice.